

The Digitax MI Taximeter has several communication channels that make possible the communication with the external world. Two independent RS232 serial ports at baud rate from 300 to 38400 and a 4 wire synchro channel plus a special printer driver, allow the interfacing to several devices at the same time. The Commtax 2 included protocol allows remote managing of all the taximeter, magnetic Credit Card reader, chip card and printer functions. The link to a dispatch system or another mobile terminal is accomplished on the RS232 port at any baud rate from 300 to 38400 using a frame structure N, 8, 1: signal level +/- 12 V, using the protocol COMMTAX 2 described in this document.


DIGITAX Italy Headquarter

Zona Ind.le S. Maria In Potenza - 62017 Porto Recanati (MC) ITALY - Phone +39 071 7590984 - Fax: +39 071 9797405
 Web www.digitax.com - E-mail info@digitax.com



Mirror Taximeter

Digitax Electronics U.K.	Digitax CO. Mauritius	Digitax España	Digitax Deutschland
Smokehouse, 31 Tanners Bank North Shields - Tyne & Wear NE 30 1 JH ENGLAND Phone +44 (0191) 296 1294 Fax +44 (0191) 257 8438 Web www.digitax.net E-mail digitaxuk@aol.com	P.O. box 775, Bel Village MAURITIUS Phone +230 234 4533/4936 Fax +230 234 5866 Web www.mtl-co.net E-mail mtlts@intnet.mu	c/ Tangèr, 58 - 08018 BARCELONA SPAIN Phone +34 934 863 835 Fax +34 934 863 836 Web www.digitax-es.com E-mail info@digitax-es.com	alsterdorferstr. 276-278 - 22297 HAMBURG - GERMANY Phone +49 40 555 05540 Fax +49 40 555 05530 Web www.digitax-de.com E-mail poreda@web.de

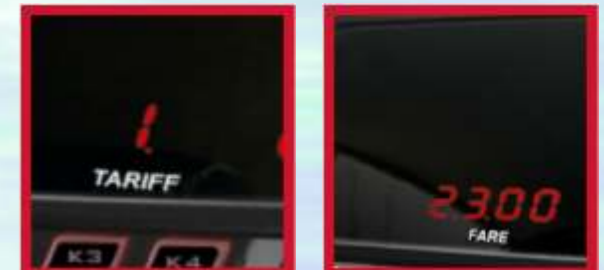



Main Features

Dimensions
Width: 28 cm.
Height: 8,5 cm.
Depth: 2,5 cm.

Weight
Gr. 350 ca.

Displays
Fare counter:
6 Digits Red High-Luminosity Led
Extra counter:
5 Digits Red High-Luminosity Led
Illuminated Front Text
1 Digit tariff index

Power Supply
From 8,5 to 16 Volts

Temperature
From -15 to 70 °C.

Relative Humidity
95%

Mechanical Strenght
3 g

Distance Unit
From 10 cm. to 6553 meters
Step 10 cm.

Waiting Time Unit
From 0,1 sec. to 6553
Step 0,1 sec.

Totalizator Mode
Dataflash 1Mb
- 45 + 45 Statistic Memory
- 12 x 45 Monthly Statistic
- 50 x 45 Statistics for each Driver

Tariff Structure
63 Smart and fully independent Tariffs
+8 Night Tariffs
+8 Holiday Tariffs
+4 Autofare Tariffs
+4 Autidistance Tariffs

Tariff Choice
Manual
Radio
Automatic at pre-programmed:
- Distance(s)
- Time(s)
- Date(s)
- Fare(s)
- Amount(s)

Tariff Program Change
Manual by Key
Via Radio
By Programmer
By Chip Card
By Infrared Programmer

Peripheral Connections
Printer
Magnetic Card Reader
Chip Card Reader/Writer
Infrared Passenger Sensor
Mobile Data Terminal
Modem
Cellular Phone

Communications Ports
Internal COM1 and COM2
RS232 +/- 12 Volts STD
4 Input/Output TTL level

Communications Protocols
GMSI
Mobilstar
RomaNet
Telecom It. (Upgradable)

Operative Firmware
Upgradable firmware on Flash

Transducer
Mechanical Hall Effect or Internal adapter for
electronic speedometer up to 100.000 l/km

Power Outputs
1 Roof Light 25 Watts
4 Programmable power outputs 5 Watts



Steering wheel
remote control (optional)

